# THE TOYOTA ADVANTAGE

As Australia's leading forklift company, it doesn't matter whether we are supplying you a single spare part, a rental forklift or helping to manage your entire fleet, our objective and commitment remains the same – adding value to your operation. That's the Toyota Advantage.



#### **LEGENDARY RELIABILITY**

Every forklift we sell is built with the same precision and famous advanced manufacturing technologies as Toyota's automotive products. But we don't just say it, we've demonstrated it for over 50 years. That's why when you choose to partner with Toyota Material Handling, you're choosing our legendary quality, durability and reliability.



#### **WORLD LEADING SAFETY**

Safety is as much a part of our business as it is yours. That's why we pioneered the System of Active Stability™\* (SAS™) over 20 years ago. Over 3,000 calculations per second delivering class leading stability, safety and assisting accident prevention – protecting your most valuable assets. We may have pioneered SAS™ over 20 years ago – but we never sit still when it comes to safety. That's why when you choose Toyota, you're choosing our world class safety.



#### **DRIVEN BY INNOVATION**

We know that innovation drives your business, because it's what drives ours. From our trusted market leading Toyota forklifts, to our industry leading System of Active Stability™ safety and I\_Site telematics technologies, our spirit of continuous improvement drives us forward. We're also proudly committed to a sustainable future with energy leading solutions and zero operating emissions forklifts.



#### MORE UPTIME NO MATTER WHERE YOU ARE

500+ service support staff. 300+ mobile service vans. 20 locations. Parts and service when and where you need them. In a country as large as ours – you need a service network as big as ours. That's why when you choose to partner with Toyota Material Handling, you get the ongoing support of Australia's most dedicated service and parts network.



#### **DELIVERING MORE THAN JUST FORKLIFTS**

We're proud to offer an unparalleled range of complementary products suitable for Australian businesses. From elevated work platforms, sweepers and scrubbers, Taylor-Dunn electric vehicles, to our innovative range of services such as telematics and fleet management solutions or when increasing demand means you need to tap into Australia's biggest forklift rental fleet. As Australia's leading forklift company we strive to give you so much more.



Toyota Material Handling Australia (TMHA) has used its best endeavours to ensure brochure information is correct when published. All images are used for illustration purposes only and actual colour of products may differ from images displayed. Some photos have been computer-enhanced. The data in this brochure was determined based on standard testing conditions. Operating performance may vary depending on the actual specifications and condition of the vehicle, as well as the conditions of the operating area. TMHA, to the extent permissible at law, is not liable to any person for loss or damage arising from reliance upon information contained in this brochure. Distributed nationally by TMHA Pty Limited ABN 38 104 644 635. 8 Secombe Place Moorebank NSW 2170. Printed August 2024. "System Of Active Stability available only on selected Toyota forklifts.



1800 425 438 toyotamaterialhandling.com.au













1.0 TO 2.0 TON ELECTRIC POWERED FORKLIFT

Multi-talented Forklift with compact body, outstanding turning performance, excellent stability and operability for narrow worksites to perform various material handling operations.




Intersecting Aisle Width Basic Right Angle Stacking Aisle Width\* 8FBE15 1,865mn \*Add load length and clearance



The Same Lateral Stability As 4-wheel Forklifts

Excellent stability in traveling, turning and high mast heights operations. The Same Lateral Stability As a common mechanism of 4-wheel Forklifts

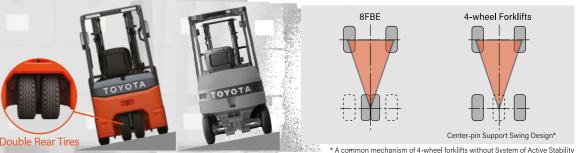

Features and equipment may vary depending on market.



### **Long Operating Time with Low Energy Consumption**


Motors and motor-drivers, exclusive design for forklifts minimize energy loss and heat generation. This contributes to achieve best-in-class long operating time.

8h47min




#### **Regenerative Systems**

During accelerator release, braking and switchback, the energy is recovered in the battery for long operating time.

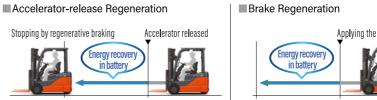





#### Auto Power-off Function

This feature supports energy savings by automatically switching off the power after the operator leaves the forklift for a certain period of time.





#### Key-off Light-off

Whenever the "Key-off" function is activated, the light goes out automatically. This avoids needless electric power consumption.



#### Long Operating Time by battery exchange options. It contributes to minimize the downtime for battery exchange.

#### Battery Side-out Option



The battery with fork pockets can be taken out from the right side of the truck by using a forklift. The option is available with Single Overall Electrolyte Filler Ports option.

\* The models with this option have a minimum ground clearance 12.5 mm lower than the standard model.

#### Battery Roll-out Option



Exchange the battery by extracting the battery by sliding it out.

Battery Carrier option is required.
\* The models with this option have a minimum ground clearance 12.5 mm lower than the standard model


03

06

#### Helping to prevent load spills

# **Active Mast Front-tilt Angle Control** The angle of forward mast tilt

is automatically controlled to match the lift height and load weight, helping to prevent load spills or tip-over.

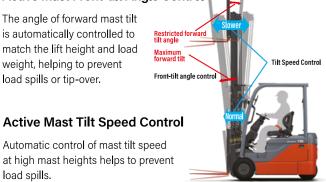

#### Provides excellent stability in load handling

#### **Automatic Fork-leveling Control**

By pressing a switch during forward tilt, forks automatically stops at a level position. This makes load-handling operations easier and helps to achieve high productivity.

#### **Active Steering Synchronizer**


This feature ensures that the angle of the steering wheel corresponds to the angle of the rear wheels.

#### Stable in traveling and turning

# **Turn-speed Control**

load spills.

This controls turn speed according to the lift height, load weight and turning radius. This contributes to enhanced travel stability.

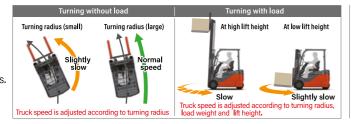

# Travel-speed Control

This controls maximum travel speed as well as acceleration and deceleration according to lift height and load weight, This contributes to ensure stable travel and to prevent load spills.



# A support system for avoiding unintentional accidents when operator leaves the forklift

#### Load handling OPS function

If the operator is not in the normal operating position, load-handling operations are stopped.

To deactivate the load handling OPS, always return the all levers to the neutral position, before returning to the seat.

#### **Travel OPS function**

If the operator is not in the normal operating position, travel power

To deactivate the travel OPS, always return the direction control lever to the neutral position and release the accelerator pedal, before returning to the seat.

Note: OPS does not operate the brakes, Always set the parking brake before leaving the forklift.

#### **OPS Active notification**

If the operator leaves the seat, the buzzer will sound and the OPS indicator lamp will illuminate to inform the operator that the OPS is going to be activated.

#### **Support for Safe Operations**



#### Orange Seatbelt Option

The color of the seatbelt is orange, making it easier to confirm if the seatbelt is securely fastened.



#### Seatbelt Interlock System Option

Travel power will be interrupted and load-handling operations will be stopped if the seatbelt is not securely fastened after the operator is properly seated.



## LED Blue Light Option

**LED Yellow Beacon** 

A light informs

pedestrians of the forklift's presence, and helps to prevent accidents.


A blue beam light appears on the ground to inform pedestrians of the forklift's presence, and helps to prevent accidents.


#### MAIN SPECIFICATIONS

Model		8FBE10	8FBE13	8FBE15	8FBE18	8FBE20
Load Capacity	kg	1,000	1,250	1,500	1,750	2,000
Load Center	mm	500	500	500	500	500
Overall Width A	mm	1,075	1,075	1,075	1,075	1,075
Turning Radius (Outside)	mm	1,385	1,400	1,515	1,550	1,675
Overhead Guard Height C	mm	1,980	1,980	1,980	1,980	1,980
Length to Fork Face	mm	1,750	1,755	1,875	1,905	2,045

#### **BATTERY AND MOTOR SPECIFICATIONS**

Model		8FBE10	8FBE13	8FBE15	8FBE18	8FBE20	
Voltage/Capacity (5-hour ratings)	Min.	V/Ah	48 / 280	48 / 280	48 / 390	48 / 390	48 / 390
	Max.	V/Ah	48 / 370	48 / 370	48 / 565	48 / 565	48 / 645
Electric Motors	Drive	kW	4.9 × 2	4.9 × 2	4.9 × 2	4.9 × 2	4.9 × 2
	Load Handling	kW	9.2	9.2	9.2	9.2	9.2
Energy Consumption (VDI Cycle) kW/h		kW/h	3.4	3.5	3.8	4.1	4.3

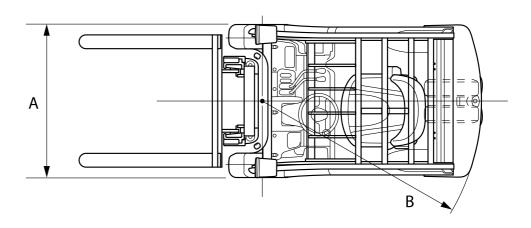

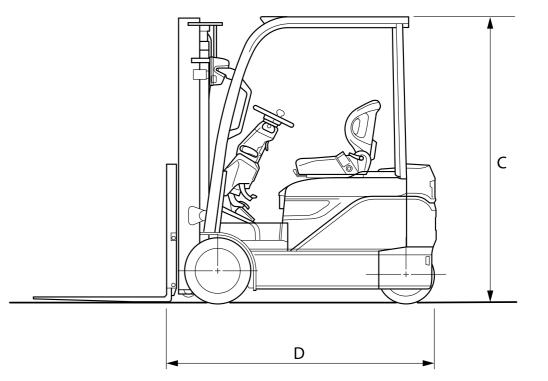

## **Emergency Power Shut-down Button** This button is located on the instrument panel. In the event of an emergency, pressing this button to switch off all power

## **Advanced Operability** and Comfort

The operator-friendly features of the 8FBE series enable operations with more comfortable and maneuverable. Also visualization of truck status by display contributes easy truck management.









#### Improved visibility and operability with various information by larger high-resolution color LCD



#### Color Multifunction Display

Color Multifunction Display is approximately twice the screen size of the previous model.

Visibility and operability with various information have been improved by larger high-resolution color LCD. A large-capacity QR code display is also available. With the new data logging capability as a result of additional memory, serviceability is improved.



Battery capacity indicator

Operator menu switch Power-select switch

Low speed setting switch

 Parking brake indicator OPS indicator

3 Spanner indicator (error is found)

Battery electrolyte level warning indicator Master warning indicator

## Selectable Screen **Background Color**

The Background color automatically switches in response to the direct sunlight. (Enabled via settings.)

#### **Power-select Function**

Selectable power modes according to operation or operator preferences.



# Maintenance hour mete



Overheat warning

Direction indicator

Wheel indicator



Load meter Returning the lift lever to the neutral, load weight will be displayed on the display. \* Note: The values indicated cannot be



Multi-hour meter This screen shows accumulated handling hour meter and seat on



Over Speed Alarm

When the travel speed exceeds the speedometer turns vellow and a warning buzzer notifies the operator.



Fork Vibration Damper Option By installing two accumulators in the hydraulic circuit of lift cylinder, fork vibratio

#### **Outstanding Visibility**

A lattice-designed overhead guard provides good upward

Optimal mast width and hose layout ensure a clear view



Equipped with a small-diameter steering wheel, optimally positioned display, and an angled lower stay for the backrest for excellent visibility of the fork tips.



Pencil and Tape Holder Option

This iron holder is useful

pencils and adhesive tape

for temporarily storing

Features and equipment may

#### - EZ Pedal Option

This accelerator pedal can be used to change the direction of travel pressing the left side for right side for reversing



#### Foot-activated Parking Brake

The parking brake can be engaged with just a single



**ORS Seat** 

Smart Entry System Option

Rear Pillar Assist Grip Option This assist grip with horn button

Small-diameter Steering Wheel

The small-diameter steering wheel with the

full hydraulic power steering system provides

The ORS seat can be adjusted 150 mm forward and backward and supports a comfortable operating posture by means of side wings and

\*ORS: Operator Restraint System

position can be adjusted

to an optimal angle.

Tilt steering adjusting lever


and offers easy horn operation during reverse traveling.

Only registered operators can

operate trucks. This system prev unauthorized use of trucks by

unregistered operator.







The Large Assist Grip supports easy entry and exit

The low and wide step allows the operator to easy entry and exit with a natural posture

Large Assist Grip

Low and Wide Step

for every operator.

#### Mini Lever Option

und with and without Fork Vibration Damper

he truck without Fork Vibration Damper, large waves occurred in the tank. The truck with Fork

ibration Damper absorbs

The Mini Lever allows smooth operation. The design featuring an armrest also helps to reduce the operator's fatigue.



#### Joystick Option

This makes it possible to perform lift and tilt operations simultaneously.

## **Support for Smooth Operation on Slopes**

### Slope Sensing Auto Power Mode Selector Option

This detects the slope angle and automatically switches the driving performance to high power mode.



Note: If the High Power mode ("H" mode) is used on flat ground, the traveling performance will not change on slopes Note: The difference in the traveling speed will be small when traveling up the steep-slope and the performance level is close to the maximum level.

#### Anti-rollback

When the accelerator or brake pedal is released on slopes, the forklift stops and then descends at a constant speed. This helps to ensure smooth re-start operation on slopes.



The descending speed can be selected between 0.5 km/h and 4.0 km/h.

07



Through its structure and layout, 8FBE series achieved IPX4-equivalent water resistance.
This model can be used for outdoor operation without concern.





TOYOTA

LED Lights are used on the rear combination lights and available as options for headlights and front combination lights.





**LED Rear** Working Light



#### Resin Roof/Resin Roof (Gray colored) Option

The heat-insulating and light-absorbing resin material keeps outdoor operation comfortable even when exposed to strong sunlight.



#### **Robust Body Design**

The counterweight is extended to its sides and contributes to reduce the risk of collision damage during turns.

SAS (System of Active Stability)-E	MAIN EQUIPME	NT				$\bigcirc$ Standard $\triangle$ Option		
SAS (System of Active Stability)-E  Automatic Turn-speed Control/Automatic Travel-speed Control Emergency Power Shut-Down Button Rear-View Mirrors, Right and Left Sides Orange Seateble Interfock System Headelight LED Front Combination Lights LED Rear Working Light LED Rear Combination Lights LED Rear Working Light Rear Working Li		Model	1.0ton	1 <b>.</b> 25ton	1.5ton	1.75ton	2.0ton	
Automatic Tum-speed Control Automatic Times-Aspeed Control   Compression   Compressi	Item		8FBE10	8FBE13	8FBE15	8FBE18	8FBE20	
Emergency Power Shut-Down Button		SAS (System of Active Stability)-E	0	0	0	0	0	
Rear-View Mirrors, Right and Left Sides		Automatic Turn-speed Control/Automatic Travel-speed Control	0	0	0	0	0	
Orange Seatbelit		Emergency Power Shut-Down Button	0	0		0	0	
Seatible   Interlock System		Rear-View Mirrors, Right and Left Sides	Δ	$\triangle$		$\triangle$	Δ	
Headlight   LED Front Combination Lights		Orange Seatbelt	$\triangle$	$\triangle$	Δ	$\triangle$		
LED Front Combination Lights		Seatbelt Interlock System	Δ	Δ		Δ	Δ	
LED Rear Combination Lights		Headlight	0			0	0	
LED Rear Working Light		LED Front Combination Lights				Δ	Δ	
Stability   LED Vellow Beacon		LED Rear Combination Lights	0			0		
LED Blue Light		LED Rear Working Light		1	1	Δ		
Forward & Back-up Chime		LED Yellow Beacon				Δ	Δ	
Back-up Buzzer	Stability	LED Blue Light				Δ	Δ	
Back-up Buzzer		-	$\triangle$			$\triangle$		
Adjustable Volume Back-up Buzzer		Back-up Chime				$\triangle$	$\triangle$	
Forward Chime		Back-up Buzzer				$\triangle$	Δ	
Clamp Release Interlock 3rd lever		Adjustable Volume Back-up Buzzer				$\triangle$	$\triangle$	
Clamp Release Interlock 4th lever			$\triangle$			$\triangle$	$\triangle$	
Battery (Wet Cell)						$\triangle$	$\triangle$	
Battery Charger (Off-Truck Type)		·				Δ	Δ	
Battery Charger (Off-Truck Type)						$\triangle$	Δ	
Single Overall Electrolyte Filler Ports						Δ	Δ	
Battery   Battery Protecting Function						$\triangle$	$\triangle$	
Rey-off Light-off						$\triangle$	$\triangle$	
Rey-off Light-off   Sattery Side-out   Sattery Side-out   Sattery Side-out   Sattery Roll-out   Sattery Roll-out   Sattery Roll-out   Sattery Carrier   Sattery Side-out   Sattering Wheel With Knob   Suspension Seat w / Damper   Suspension Seat w	Battery	_				Δ		
Battery Roll-out   Battery Carrier   12V Power Supply   △ △ △ △ △ △ △ △ △ △ △ △ △ △ △ △ △ △	<b>,</b>		0			0	0	
Battery Carrier   12V Power Supply		-				Δ		
12V Power Supply						$\triangle$	$\triangle$	
Steering Wheel With Knob		_				$\triangle$	$\triangle$	
Suspension Seat w / Damper		111				Δ	Δ	
Overhead Guard Sheet   A A A A A A A A A A A A A A A A A A		_		_		0	0	
Rear Pillar Assist Grip   Resin Roof ( Resin Roof ( Gray colored )						Δ	Δ	
Resin Roof / Resin Roof (Gray colored)						$\triangle$	$\triangle$	
Fork Vibration Damper		· ·				$\triangle$	Δ	
Operability & Comfort         Slope Sensing Auto Power Mode Selector         △		, , , ,				$\triangle$	$\triangle$	
Comfort         Front Windshield w / Wiper & Washer         △						$\triangle$	$\triangle$	
EZ Pedal		-				$\triangle$	<u> </u>	
Mini Lever	Cominort					$\triangle$	$\triangle$	
Joystick						$\triangle$	$\triangle$	
Armrest Horn						$\triangle$	$\triangle$	
Cup Holder		-				$\triangle$	$\triangle$	
Pencil and Tape Holder						$\triangle$		
Color Multifunction Display						Δ		
Deluxe Color Multifunction Display		·				O		
Service & Management         Key-Less Ignition Switch         △ <td></td> <td></td> <td></td> <td></td> <td></td> <td>Δ</td> <td></td>						Δ		
Management         PIN Code Entry System         △ <t< td=""><td>C</td><td></td><td></td><td></td><td></td><td><math>\triangle</math></td><td><math>\triangle</math></td></t<>	C					$\triangle$	$\triangle$	
Smart Entry System						$\triangle$	Δ	
Tilt Cylinder Boots         △	Management					$\triangle$	$\triangle$	
Rib-Lug Tire, Front         ○		* *	$\wedge$	$\overline{\wedge}$	$\wedge$	$\triangle$	$\triangle$	
J-Lug Tire, Front		•				0		
U-Lug Non-Punk Tire, Front         △<	Tires	-						
J-Lug Non-Punk Tire, Front         △<		-				$\triangle$		
Rib-Lug Tire, Rear						$\triangle$	Δ	
J-Lug Tire, Rear         △         △         △         △           U-Lug Non-Punk Tire, Rear         △         △         △         △           J-Lug Non-Punk Tire, Rear         △         △         △         △           Wide Visible Mast (V)         ○         ○         ○         ○		-						
U-Lug Non-Punk Tire, Rear         △         △         △         △           J-Lug Non-Punk Tire, Rear         △         △         △         △           Wide Visible Mast (V)         ○         ○         ○         ○		-						
J-Lug Non-Punk Tire, Rear         △         △         △         △           Wide Visible Mast (V)         ○         ○         ○         ○		_				$\triangle$	$\triangle$	
Wide Visible Mast (V)						$\triangle$	$\triangle$	
	Load Handling	· ·				0	0	
Tall Floo Elit IVO Otago Maot (I V /   /\   /\   /\   /\		Full-Free Lift Two-Stage Mast (FV)	$\triangle$	$\triangle$	$\triangle$	$\triangle$		
						$\triangle$	Δ	
						$\triangle$	$\triangle$	
						$\triangle$		
						$\triangle$	ă ă	
						$\triangle$	$\triangle$	
Cold-Storage Model (Type 45S)			^			Δ	Δ	
	Special Edition					Δ		
	opecial Eullion					$\triangle$		

09 10